




# Build smarter, even in the toughest conditions.

3M™ Air and Vapour Barrier 3015NP

Provide building protection that installs faster\* under extreme conditions without sacrificing performance using 3M™ Air and Vapour Barrier 3015NP. 3M acrylic adhesive technology allows for primer-free application from lightweight rolls that saves you up to 40% on installation time compared to traditional barriers that require a primer.

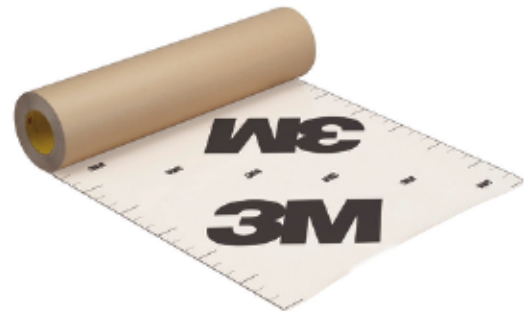

**-18 to 66°C**  
application temperature.



**40% faster**  
installation\*.




**Highly compatible**  
with other materials.

**Let's Build Smarter.**

\*As compared to traditional primer applied air barriers.



## Benefits

- Increased opacity – provides a clean look and visibility of screw heads to minimize missing the stud
- Compatible with most sealants and building materials
- Meets AAMA 711-13 Voluntary Specification for Self Adhering Flashing Use for Installation of Exterior Wall Fenestration Products
- Seals around screws, nails, and staples to further reduce moisture intrusion. It passes ASTM D1970 both before and after thermal cycling
- ABAA Evaluated 

### Up to 40% time savings\*.

No primer required. Aggressive, high-tack pressure-sensitive acrylic adhesive technology eliminates the time and materials usually needed for applying air barriers

### 3M acrylic adhesive increases compatibility.

- Compatible with a wide range of common sealants, including synthetic rubber, butyl, polyurethane, silicone and silane-terminated hybrid sealants
- Passes NFPA 285 as part of various exterior wall constructions
- Sticks well to concrete, concrete block, anodized aluminum, galvanized metal, plywood, extruded polystyrene and most exterior gypsum sheathing

### Extended temperature range increases production.

- Productivity in all conditions. Application temperatures from -18° to 66°C (0° to 150°F)
- Service temperature range from -40° to 116°C (-40° to 240°F)



3M Industrial Adhesives and Tapes Division

1-877-877-0873  
airvapourbarrier.com

\*As compared to traditional primer applied air barriers. Independent Observation and White Paper written by Lee Durston, Director of Building Science and Dani Ittner, Building Envelope Architect, BCRA Inc., September 2012.

**Warranty and Limited Remedy:** 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS, INCLUDING ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If a 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement or repair of the 3M product or refund of the purchase price. **Limitation of Liability:** Except for the limited remedy above, and except to the extent prohibited by applicable law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential, regardless of the legal or equitable theory asserted.

3M and 3M Science. Applied to Life. are trademarks of 3M. Used under license in Canada. © 2021, 3M. All rights reserved. 2106-20917 E

Let's Build Smarter.